



1

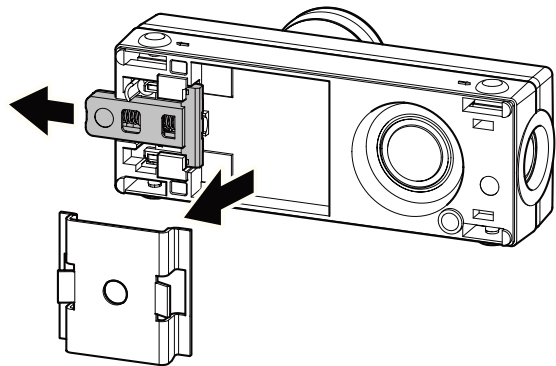


E-BOX modular

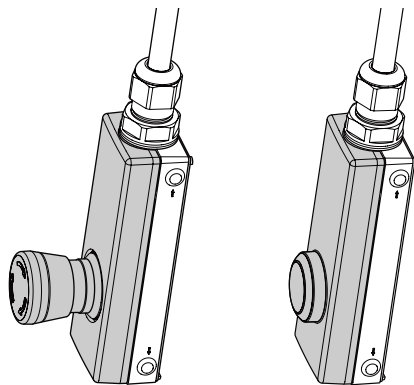


2



a

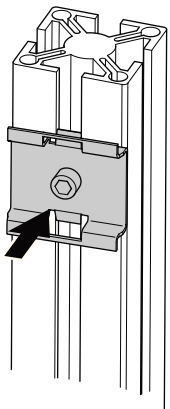

b

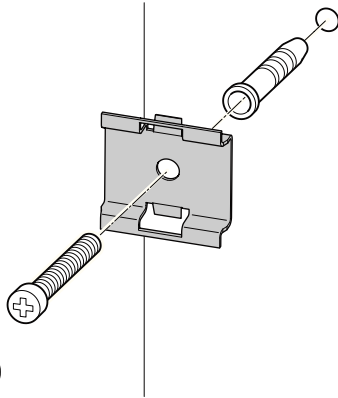


c

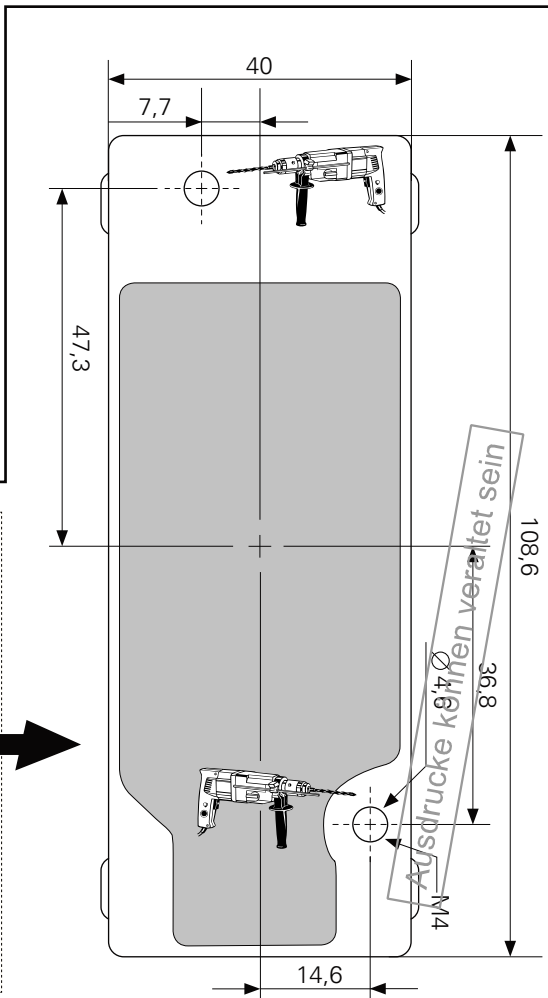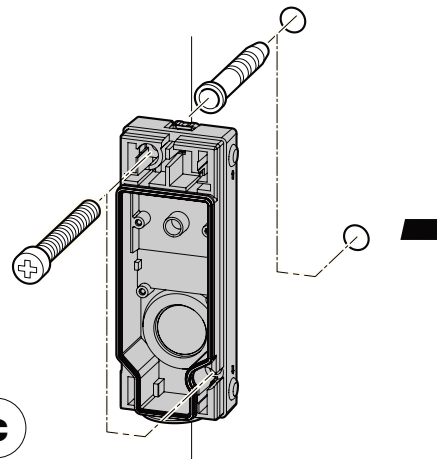


3


a

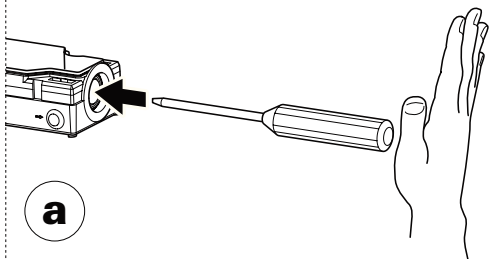


b




4

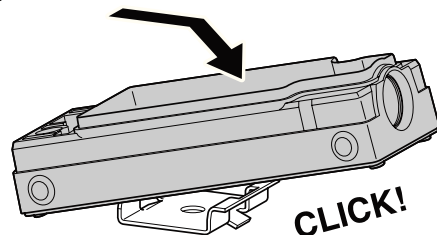


5

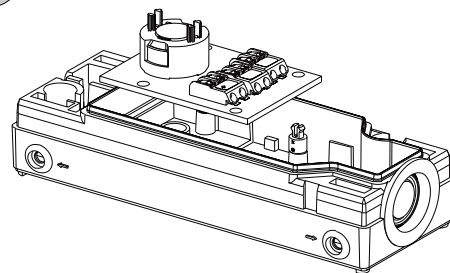

6

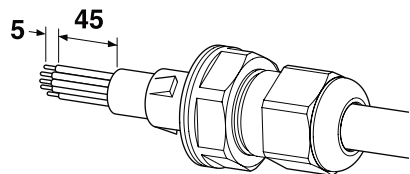


7

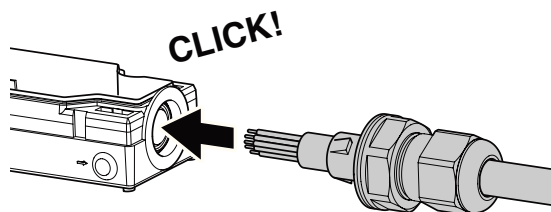


a

b

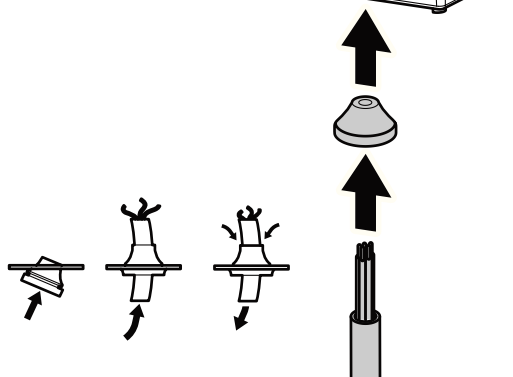


8

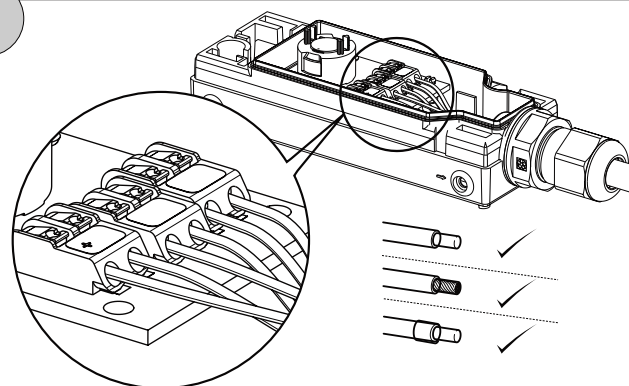


Ratings / Mounting as defined in	IEC/EN 60664-1 & IEC/EN-61058, mount in compliance with Pollution Degree 2
PCB Terminal Block	WAGO, 2060-452/998-404 (variant with Au contacts) WAGO, 2060-852/998-404 (variant with Ag contacts)
Conductor size: solid	0.2-0.75 mm ²
Conductor size: fine-stranded	0.2-0.75 mm ²
Conductor size: fine-stranded	0.25-0.34 mm ² (with insulated ferrule)
Conductor size: fine-stranded	0.25-0.34 mm ² (with uninsulated ferrule)
AWG	24 - 18
Strip length	7-8 mm / 0.28 - 0.031 in.



9

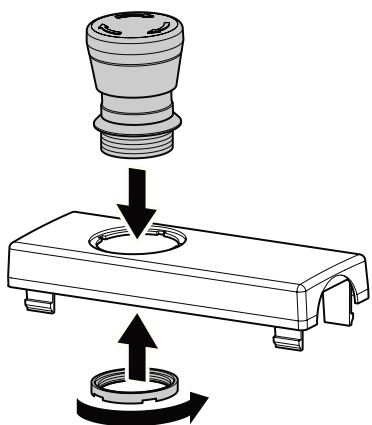

10

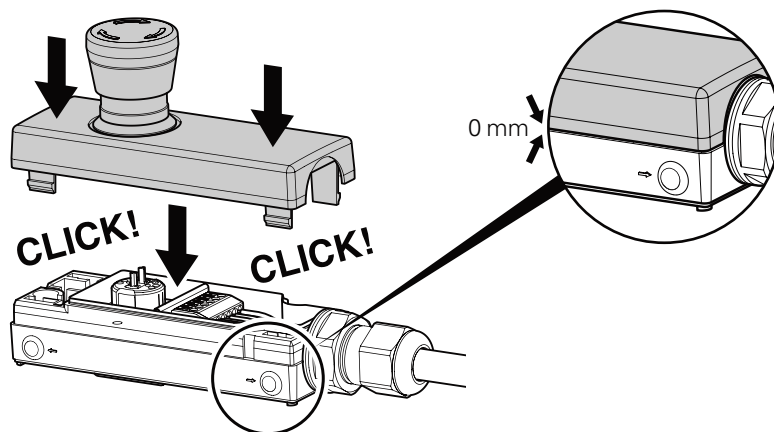

Actuators of the RAFIX 22 FS+ range. Selector and keylock switches on request.

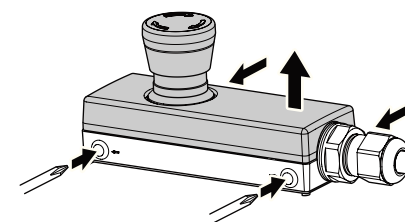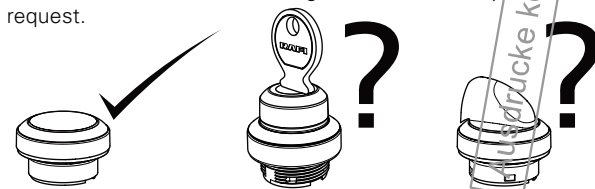

RAFI GmbH & Co. KG

Ravensburger Str. 128–134, D-88276 Berg/Ravensburg
Tel.: +49 751 89-0, Fax: +49 751 89-1300
www.rafi.de, info@rafi.de

RAFI